



Multiple Family Lighting
Residential Lighting
Hospitality Lighting
Commercial Lighting

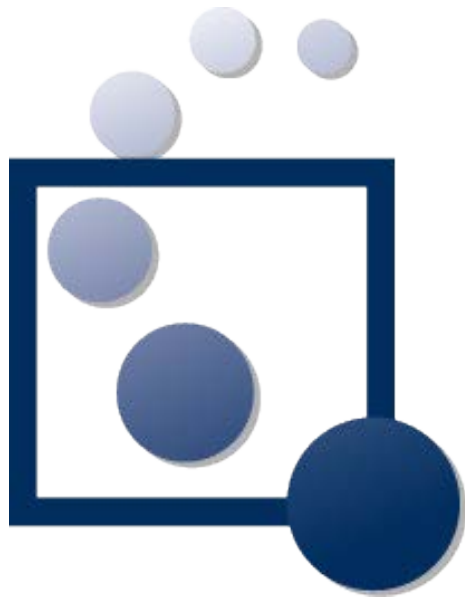


XTC
LIGHTING

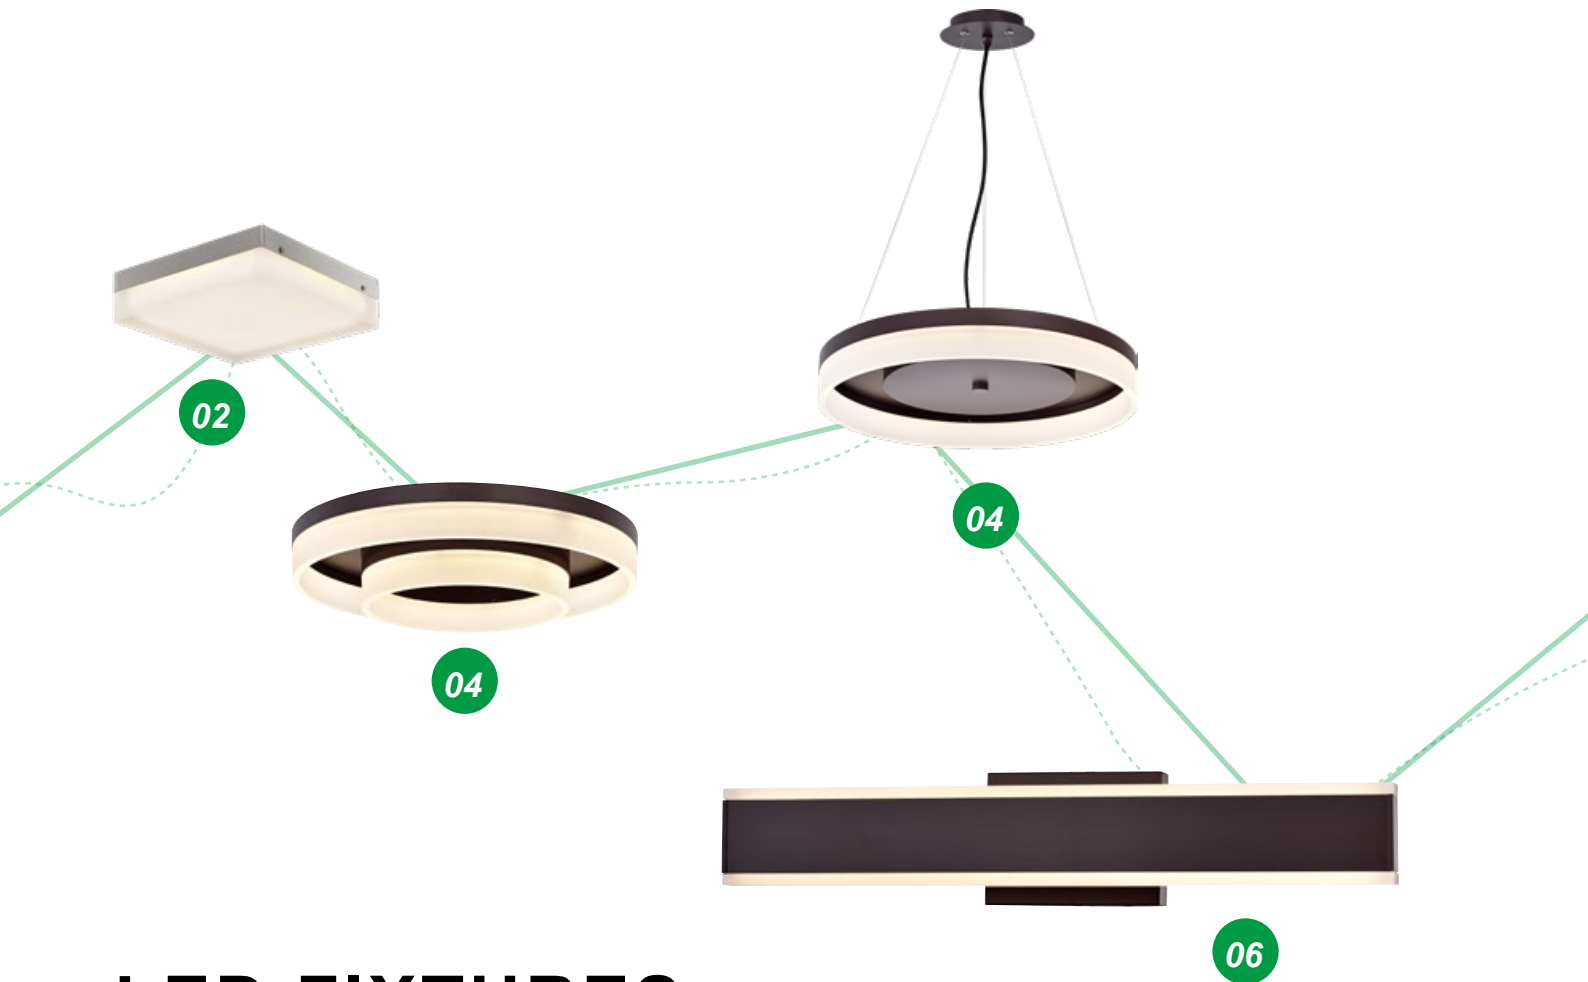

LED FIXTURES

<i>LED Ceiling Fixture</i>	<i>02 - 04</i>
<i>LED Pendant</i>	<i>02,04,10,11,13</i>
<i>LED Wall Sconce</i>	<i>07 - 09</i>
<i>LED Vanity</i>	<i>05 - 07</i>
<i>LED Outdoor Fixture</i>	<i>12 - 13</i>
<i>Round & Square LED Panel</i>	<i>13</i>
<i>LED Disk Light / Closet Light</i>	<i>14</i>
<i>DC & AC Light Engine</i>	<i>15</i>
<i>Hospitality Lighting</i>	<i>16 - 17</i>

Index

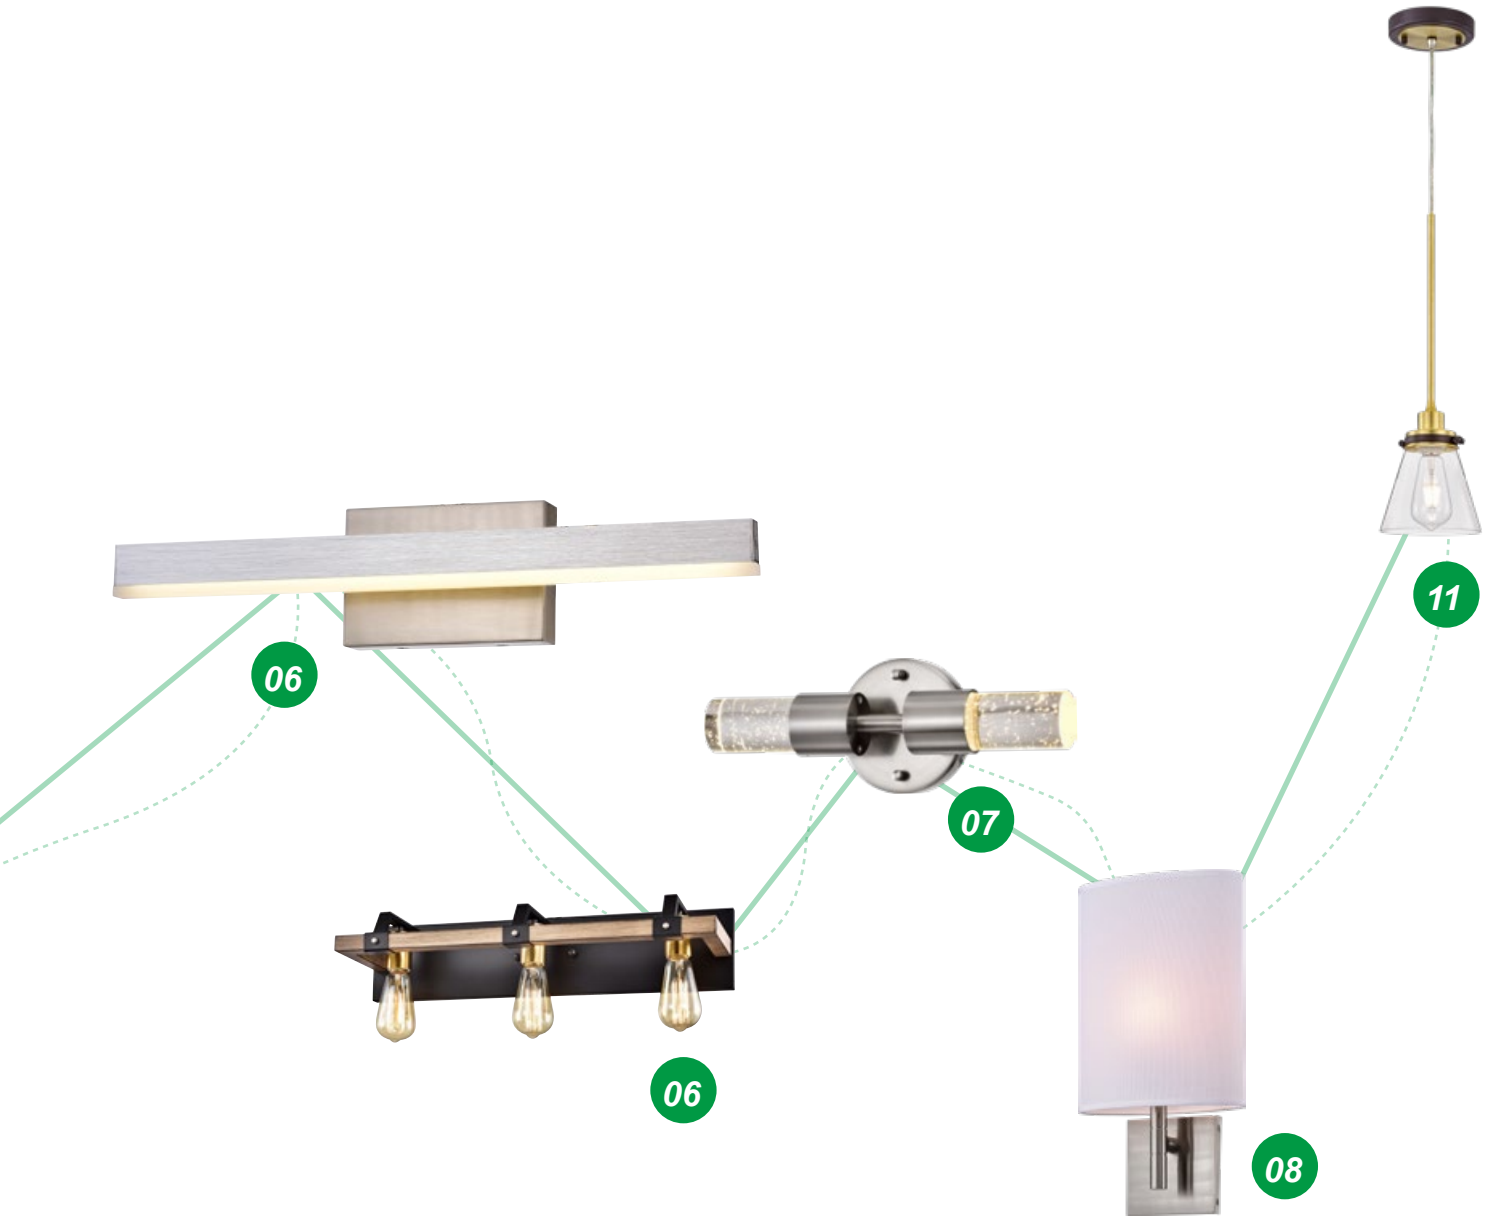

LED CEILING FIXTURE



- * Housing: Die-formed cold-rolled steel
- * Shade: High transmission acrylic or glass creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * CRI > 80
- * 5 years warranty on driver and LED module
- * Certification: ETL / cETL

******* New Low Profile Models *******



Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H)
DC712D-62-xxxxK	120V ~ 277V	17W	Satin Nickel	Acrylic / linen	3000K or 4000K	960	11.7" x 3.0"
DC714D-62-xxxxK	120V ~ 277V	24W	Satin Nickel	Acrylic / linen	3000K or 4000K	1610	14.5" x 3.0"
DC718D-62-xxxxK	120V ~ 277V	35W	Satin Nickel	Acrylic / linen	3000K or 4000K	2300	17.7" x 3.0"
DC712D-PD-62-xxxxK	120V ~ 277V	17W	Satin Nickel	Acrylic / linen	3000K or 4000K	960	11.7" x 10.0"
DC714D-PD-62-xxxxK	120V ~ 277V	24W	Satin Nickel	Acrylic / linen	3000K or 4000K	1610	14.5" x 10.0"
DC718D-PD-62-xxxxK	120V ~ 277V	35W	Satin Nickel	Acrylic / linen	3000K or 4000K	2300	17.7" x 10.0"

* Finish Option: -30 Oil Rubbed Bronze



1911D-62



1912D-62

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (L x W x H)
1911D-62-xxxxK	120V	18W	Satin Nickel	Frosted Glass	3000K or 4000K	1100	9.1" x 9.1" x 2.5"
1912D-62-xxxxK	120V	18W	Satin Nickel	Frosted Glass	3000K or 4000K	1100	10.9" OD x 2.3" H

* Finish Option: -30 Oil Rubbed Bronze, -06 White

LED CEILING FIXTURE

03

- * Housing: Die-formed cold-rolled steel
- * Shade: High transmission acrylic or glass creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * CRI > 80
- * 5 years warranty on driver and LED module
- * Certification: ETL / cETL

******* New Low Profile Models / Multiple Color Temperature*******



ECO Series



ECO Style B series

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H)
ECO12D-62-xxxxK	120V	18W		Acrylic	3000K or 4000K	1150	11.8" x 3.0"
ECO14D-MCT-62	120V	25W	Satin Nickel	Acrylic	3000K/3500K/4000K	1590	14.5" x 3.5"
ECO16D-MCT-62	120V	25W		Acrylic	3000K/3500K/4000K	1590	16.0" x 4.0"
ECO18D-MCT-62	120V	32W		Acrylic	3000K/3500K/4000K	2260	17.8" x 4.0"
ECO12D-B-62-xxxxK	120V	18W	Satin Nickel	Acrylic	3000K or 4000K	1390	12.5" x 3.8"
ECO14D-MCT-B-62	120V	25W		Acrylic	3000K/3500K/4000K	1670	15.0" x 3.8"
ECO16D-MCT-B-62	120V	25W		Acrylic	3000K/3500K/4000K	1670	16.6" x 4.1"
ECO18D-MCT-B-62	120V	32W		Acrylic	3000K/3500K/4000K	2410	18.4" x 4.1"

* Finish Option: -30 Oil Rubbed Bronze

* -PD: Available Pendant Models



2-0240D / 2-0241D / 2-0242D



1133D

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H)
2-0240D-06-xxxxK	120V	18W	White	Acrylic	3000K or 4000K	1440	11.0" x 3.3"
2-0241D-MCT-06	120V	25W	White	Acrylic	3000K/3500K/4000K	1730	14.0" x 3.6"
2-0242D-MCT-06	120V	25W	White	Acrylic	3000K/3500K/4000K	1730	16.0" x 3.6"
1133D-62-xxxxK	120V	18W	Satin Nickel	Alabaster Glass	3000K/3500K/4000K	1270	14.5" x 5.4"

* Finish Option: -30 Oil Rubbed Bronze, -06 White, -62 Satin Nickel

LED CEILING FIXTURE & PENDANT

- * Housing: Die-formed cold-rolled steel
- * Shade: High transmission acrylic creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * CRI > 80
- * External driver, 0-10V dimming
- * High power factor, low THD
- * 5 years warranty on driver and LED module
- * Certification: ETL / cETL



C1220D

C1112D / C1116D



C1120D-PD

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H)
C1112D-30-xxxxK	120V ~ 277V	21W	Oil Rubbed Bronze	Acrylic	3000K or 4000K	1260	11.8" x 2.8"
C1116D-30-xxxxK	120V ~ 277V	34W	Oil Rubbed Bronze	Acrylic	3000K or 4000K	1980	15.8" x 2.8"
C1120D-30-xxxxK	120V ~ 277V	44W	Oil Rubbed Bronze	Acrylic	3000K or 4000K	2330	19.7" x 2.8"
C1120D-PD-30-xxxxK	120V ~ 277V	44W	Oil Rubbed Bronze	Acrylic	3000K or 4000K	2330	19.7" x 2.8" x 6'
C1220D-30-xxxxK	120V ~ 277V	58W	Oil Rubbed Bronze	Acrylic	3000K or 4000K	2960	19.7" x 4.2"
C1220D-PD-30-xxxxK	120V ~ 277V	58W	Oil Rubbed Bronze	Acrylic	3000K or 4000K	2960	19.7" x 4.2" x 6'

- * Finish Option: -08 Gray, -30 Oil Rubbed Bronze
- * Option: Pendant mount by hanging cable
- * Emergency Back Up model available



P3234D-30 / P3246D-30

P3234D-23 / P3246D-23

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (L x W x H)
P3234D-MCT-60	120V ~ 277V	36W	Brushed Aluminum	Acrylic	3000K/3500K/4000K	2800	34.0" x 8.9" x 2.8"
P3246D-MCT-60	120V ~ 277V	50W	Brushed Aluminum	Acrylic	3000K/3500K/4000K	3720	46.0" x 8.9" x 2.8"

- * Finish Option: -30 Oil Rubbed Bronze, -23 Champagne Gold
- * With 6 Ft hanging cable

LED VANITY

05

- * Housing: Die-formed cold-rolled steel
- * Shade: High transmission acrylic creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * CRI > 80
- * High power factor, low THD
- * 5 years warranty on driver and LED module
- * Certification: ETL / cETL

****** Multiple Color Temperature (MCT) - 3000K/3500K/4000K ******



V66xxD Series



FL55xxD-E Series

Model	Input Voltage	Input Wattage	LED CT	Shade	Lumen (typ)	Finish	Dimension (L x W x E)
V6624D-MCT-62	120V ~ 277V	17W	3000K/3500K/4000K	Acrylic	1400	Satin Nickel	24.0" x 4.3" x 3.7"
V6636D-MCT-62	120V ~ 277V	22W	3000K/3500K/4000K	Acrylic	1900	Satin Nickel	36.0" x 4.3" x 3.7"
V6648D-MCT-62	120V ~ 277V	32W	3000K/3500K/4000K	Acrylic	3000	Satin Nickel	48.0" x 4.3" x 3.7"
FL5524D-MCT-E-62	120V ~ 277V	17W	3000K/3500K/4000K	Acrylic	1520	Satin Nickel	25.5" x 4.3" x 3.8"
FL5539D-MCT-E-62	120V ~ 277V	24W	3000K/3500K/4000K	Acrylic	2110	Satin Nickel	37.5" x 4.3" x 3.8"
FL5554D-MCT-E-62	120V ~ 277V	36W	3000K/3500K/4000K	Acrylic	3220	Satin Nickel	49.3" x 4.3" x 3.8"

* Finish Option: -30 Oil Rubbed Bronze



FL55xxD-F



FL6724D

Model	Input Voltage	Input Wattage	LED CT	Shade	Lumen (typ)	Finish	Dimension (W x H x E)
FL5524D-MCT-F-62	120V ~ 277V	17W	3000K/3500K/4000K	Acrylic	1520	Satin Nickel	24.8" x 5.8" x 3.0"
FL5539D-MCT-F-62	120V ~ 277V	24W	3000K/3500K/4000K	Acrylic	2110	Satin Nickel	36.8" x 5.8" x 3.0"
FL6724D-62-xxxxK	120V	30W	3000K or 4000K	Crystal Glass	2400	Satin Nickel	24.0" x 7.0" x 3.3"

* Finish Option: -30 Oil Rubbed Bronze

* CT option: 3500K, 4000K

LED VANITY

- * Housing: Die-formed cold-rolled steel
- * Shade: High transmission acrylic creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * CRI > 80
- * High power factor, low THD
- * 5 years warranty on driver and LED module
- * Certification: ETL / cETL, UL / cUL

****** Multiple Color Temperature (MCT) - 3000K/3500K/4000K ******



Model	Input Voltage	Input Wattage	LED CT	Shade	Lumen (typ)	Finish	Dimension (L x W x E)
V6822D-MCT-60	120V ~ 277V	24W	3000K/3500K/4000K	Acrylic	1760	Brushed Aluminum	22.0" x 4.3" x 2.9"
V6834D-MCT-60	120V ~ 277V	36W	3000K/3500K/4000K	Acrylic	2890	Brushed Aluminum	34.0" x 4.3" x 2.9"
V6846D-MCT-60	120V ~ 277V	50W	3000K/3500K/4000K	Acrylic	3720	Brushed Aluminum	46.0" x 4.3" x 2.9"

* Finish Option: -30 Oil Rubbed Bronze,-23 Champagne Gold



V69xxD Series



V192D-33

Model	Input Voltage	Input Wattage	LED CT	Shade	Lumen (typ)	Finish	Dimension (L x W x E)
V6922D-MCT-60	120V ~ 277V	18W	3000K/3500K/4000K	Acrylic	1200	Brushed Aluminum	22.0" x 4.7" x 3.2"
V6934D-MCT-60	120V ~ 277V	23W	3000K/3500K/4000K	Acrylic	2000	Brushed Aluminum	34.0" x 4.7" x 3.2"
V6946D-MCT-60	120V ~ 277V	35W	3000K/3500K/4000K	Acrylic	3000	Brushed Aluminum	46.0" x 4.7" x 3.2"
V192D-33-3-E26	120V	3 x 9W	2700K	Bulb Glass	2400	ORB/Antique Bronze	23.5" x 5.0" x 6.8"

* Finish Option for V69xxD Series: -30 Oil Rubbed Bronze,-23 Champagne Gold

LED VANITY

- * Housing: Die-formed cold-rolled steel
- * Shade: High transmission acrylic creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * High power factor, low THD
- * 5 years warranty on driver and LED module
- * Certification: ETL / cETL

****** Multiple Color Temperature (MCT) - 3000K/3500K/4000K ******



V18xxD Series



V17xxD Series

Model	Input Voltage	Input Wattage	Finish	Shade	Lumen (typ)	LED CT	Dimension (L x W x E)
V1724D-MCT-62	120V ~ 277V	16W	Satin Nickel	Acrylic	1300	3000K/3500K/4000K	26.0" x 4.7" x 4.0"
V1736D-MCT-62	120V ~ 277V	23W	Satin Nickel	Acrylic	2400	3000K/3500K/4000K	37.0" x 4.7" x 4.0"
V1748D-MCT-62	120V ~ 277V	36W	Satin Nickel	Acrylic	3800	3000K/3500K/4000K	48.0" x 4.7" x 4.0"
V1824D-MCT-62	120V ~ 277V	16W	Satin Nickel	Acrylic	1300	3000K/3500K/4000K	26.0" x 4.7" x 4.0"
V1836D-MCT-62	120V ~ 277V	23W	Satin Nickel	Acrylic	2400	3000K/3500K/4000K	37.0" x 4.7" x 4.0"
V1848D-MCT-62	120V ~ 277V	36W	Satin Nickel	Acrylic	3800	3000K/3500K/4000K	48.0" x 4.7" x 4.0"

* Finish Option: -30 Oil Rubbed Bronze

LED WALL SCONCE

- * Housing: Die-formed cold rolled steel
- * Shade: Crystal glass
- * ADA Compliant
- * Certification: ETL / cETL
- * 5 years warranty on driver and LED module



W780D



W781D



W900D

Model	Input Voltage	Input Wattage	LED CT	Shade	Lumen (typ)	Finish	Dimension (W x H x E)
W780D-62-xxxxK	120V ~ 277V	20W	3000K or 4000K	Crystal Glass	1460	Satin Nickel	13.0" x 4.7" x 3.2"
W781D-30-xxxxK	120V ~ 277V	10W	3000K or 4000K		660	ORB	4.3" x 6.0" x 3.0"
W900D-05-xxxxK	120V ~ 277V	10W	3000K or 4000K		650	Black	4.3" x 5.0" x 3.9"

*Finish Option: -62 Satin Nickel, -30 Oil Rubbed Bronze, -05 Black

LED WALL SCONCE

- * Housing: Die-formed cold rolled steel
- * Shade: High transmission acrylic creates excellent light distribution and uniformity
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * CRI > 80
- * ADA Complaint
- * High Power Factor, Low THD
- * LED CRI > 80
- * Certification: ETL / cETL, UL / cUL
- * 5 years warranty on driver and LED module



W480D-60



W480D-30



W680D



W580D

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (W x H x E)
W480D-MCT-60	120V ~ 277V	17W	Brushed Aluminum	Acrylic	3000K/3500K/4000K	1200	5.1" x 12.8" x 2.3"
W580D-MCT-62	120V ~ 277V	15W	Satin Nickel	Acrylic	3000K/3500K/4000K	900	18.1" x 4.5" x 3.7"
W680D-62-E26	120V	9W	Satin Nickel	Linen	2700K	900	8.3" x 16.0" x 3.9"

* Finish Option: -30 Oil Rubbed Bronze



W370D



W420D

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (W x H x E)
W370D-33-E26	120V	2 x 6W	ORB / Antique Bronze	Metal	2700K	1600	18.0" x 4.7" x 3.5"
W420D-37-xxxxK	120V	16W	Black / Brass	Metal	3000K	215	16.5"OD x 4.0"H

* Finish Option: -30 Oil Rubbed Bronze

NEW RELEASED !

LED WALL SCONCE WITH BUILT-IN EMERGENCY LIGHT

09



MDF035D-EM



MDF036D-EM



W190D-EM



W190D-EM-L



MDF033D-EM



W109D-EM



W580D-EM



W194D-EM

Model	Input Voltage	Input Wattage	LED CT	Lumen (typ)	Finish / Shade	Dimension (W x H x D)
MDF035D-EM-xxxxK	120V	15W	3000K	1150	SN/Frosted Glass	10.3" x 11.5" x 4.0"
MDF036D-EM-xxxxK	120V ~ 277V	22W	3000K	1850	SN/Frosted Glass	12.0" x 12.0" x 4.0"
MDF033D-EM-xxxxK	120V ~ 277V	22W	3000K	1800	SN/Acrylic	9.4" x 10.5" x 4.0"
W190D-EM-xxxxK	120V ~ 277V	15W	3000K	1025	ORB/Acrylic	15.0" x 5.0" x 3.8"
W190D-EM-L-xxxxK	120V ~ 277V	23W	3000K	1550	ORB/Acrylic	24.0" x 5.0" x 3.8"
W194D-EM-xxxxK	120V ~ 277V	15W	3000K	700	Satin Nickel	12.5" x 4.5" x 3.6"
W580D-EM-MCT	120V ~ 277V	15W	3000K/3500K/4000K	900	Satin Nickel	18.1" x 4.5" x 3.7"
W109D-EM-xxxxK	120V ~ 277V	14W	3000K	1200	White	9.8" x 4.5" x 4.0"

LED PENDANT

- * Housing: Die-formed cold-rolled steel
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * LED bulb - E26 Energy Star listed, dimmable, Omni direction type
- * Certification: ETL / cETL , UL / cUL



P509D-36



P209D-36



P208D-05

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H x H1)
P509D-36-E26	120V	9W	Antique Bronze	Glass	2700K	800	9.3" x 9.5" x 6.0'
P209D-36-E26	120V	9W	Antique Bronze	Metal	2700K	800	13.8" x 9.8" x 6.0'
P208D-05-E26	120V	9W	Black	Metal	2700K	800	18.9" x 15.4" x 6.0'

* H1: Hanging cable length

* Finish Option: -62 Satin Nickel (for P509D & P209D), -05 Black, -30 Oil Rubbed Bronze



P602D



P602D-3

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H x H1)
P602D-62-xxxxK	120V ~ 277V	10W	Satin Nickel	Crystal Glass	3000K or 4000K	830	4.8" x 4.9" x 6.0'
P602D-3-62-xxxxK	120V ~ 277V	30W	Satin Nickel		3000K or 4000K	2490	9.8" x 4.9" x 6.0'

* Finish Option: -62 Satin Nickel, -05 Black, -30 Oil Rubbed Bronze

* H1: Hanging cable length

* P602D-3 Canopy size: 9.8" OD x 1.0" H

LED PENDANT

- * Housing: Die-formed cold-rolled steel
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * LED bulb - E26, Energy Star listed, dimmable, Omini direction type
- * Certification: ETL / cETL , UL / cUL



P606D



P493D-33

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H x H1)
P606D-33	120V	8W	ORB / Antique Bronze	Opal Glass	2700K	800	10.0" x 17.5" x 6.0'
P493D-33	120V	8W	ORB / Antique Bronze	Clear Glass	2700K	800	6.2" x 8.3" x 6.0'

- * H1: Hanging cable length
- * Finish Option: -62 Satin Nickel, -05 Black, -30 Oil Rubbed Bronze



Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H x H1)
P608D-62	120V	9W	Satin Nickel	Clear Glass	2700K	800	5.0" x 13.0" x 6.0'
P608D-3-62	120V	27W	Satin Nickel	Clear Glass	2700K	2400	9.8" x 13.0" x 6.0'

- * H1: Hanging cable length
- * P608D-3 Canopy size: 9.8" OD x 1.0" H
- * Finish Option: -62 Satin Nickel, -05 Black, -30 Oil Rubbed Bronze

LED OUTDOOR FIXTURE

- * Housing: Die-cast aluminum with powder coated finish
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * High power factor, low THD
- * Certification: ETL / cETL, wet location rated
- * 5 years warranty on driver and LED module



3-5046D-05-xxxxK



3-5075D-05-xxxxK



3-4310D-B-xxxxK

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (H x W x E)
3-5046D-05-xxxxK	120V ~ 277V	34W	Black	Glass	3000K or 4000K	3200	18.0" x 6.0" x 7.5"
3-4310D-B-xxxxK	120V ~ 277V	15W	Black	Acrylic	3000K or 4000K	1050	8.3" x 14.6" x 3.9"
3-5075D-05-xxxxK	120V ~ 277V	15W	Black	Polycarbonate	3000K or 4000K	470	4.7" x 13.8" x 3.3"

* Finish Option: -08 Gray, -30 Oil Rubbed Bronze



3-4042D



3-4078D



3-4079D

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (H x W x E)
3-4042D-30-xxxxK	120V	10W	ORB	Glass	3000K or 4000K	500	7.0" x 4.0" x 2.5"
3-4078D-05-xxxxK	120V	9W	Black	Glass	3000K or 4000K	400	6.3" x 6.1" x 3.7"
3-4079D-05-xxxxK	120V	9W	Black	Glass	3000K or 4000K	480	6.3"OD x 3.5"H

* Finish Option: -08 Gray, -30 Oil Rubbed Bronze, -05 Black

LED OUTDOOR FIXTURE

13

- * Housing: Die-formed cold-rolled steel or Aluminum with powder coated finish
- * LED: High efficiency, high CRI, binned and mixed to reach uniform light
- * High power factor, low THD
- * Certification: UL / cUL, wet location rated
- * 5 years warranty on driver and LED module



3-7001D



3-7001D-A



3-7005D

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (H x W x E)
3-7001D-05-E26	120V	8W	Black	Steel	3000K or 4000K	800	8.9" x 13.8" x 20.1"
3-7001D-A-05-E26	120V	8W	Black	Glass	3000K or 4000K	800	13.8" x 13.8" x 20.1"
3-7005D-05-E26	120V	8W	Black	Glass	3000K or 4000K	800	10.7" x 8.0" x 10.0"

* Finish Option: -08 Gray

23" ROUND LED PANEL & SQUARE PANEL

- * Shade: High transmission acrylic creates excellent light distribution and uniformity
- * High power factor, low THD
- * Certification: ETL / cETL



FC5024D



FC5024D-PD



RT12

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (L x W x H)
FC5024D-36W-xxxxK	120V ~ 277V	36W	White	Acrylic	3000K or 4000K	3500	22.9"OD x 2.0"H
FC5024D-PD-36W-xxxxK	120V ~ 277V	36W	White	Acrylic	3000K or 4000K	3500	22.9"OD x 72.0"H
FC5024D-PD-A-36W-xxxxK	120V ~ 277V	36W	White	Acrylic	3000K or 4000K	3500	22.9"OD x 72.0"H
RT12-9-18W-MCT	120V	18W	White	Glass	3000K/4000K/5000K	1530	8.5" x 8.5" x 0.60"
RT12-12-24W-MCT	120V	24W	White	Glass	3000K/4000K/5000K	2160	11.4" x 11.4" x 0.60"

* Hanging Cable: 6Ft, adjustable

* Up and Down Light Option: FC5024D-PD-A

LED DISK LIGHT / CLOSET LIGHT

***** **J-Box Direct Mounting or Recess Can Re-trofit** *****

***** **Multiple Color Temperature - 3000K / 4000K / 5000K** *****

***** **Built-In Motion Sensor** *****

- * Housing: Polycarbonate
- * Shade: High performance glass
- * Certification: ETL / cETL, Energy Star
- * Color Temperature Option: 3000K, 4000K, 5000K
- * LED CRI Option: > 90
- * Motion Sensor: Built-in PIR Sensor. On-off function with 3 minutes holding time
- * Suitable for recess can re-trofit or new construction



RT9



RT7-A-60



RT7-A-30

Model	Input Voltage	Input Wattage	Finish	Shade	LED CT	Lumen (typ)	Dimension (OD x H)
RT9-7-12W-MCT	120V	12W	White	Glass	3000K/4000K/5000K	1000	7.0" x 0.55"
RT9-9-18W-MCT	120V	18W	White	Glass	3000K/4000K/5000K	1530	9.0" x 0.55"
RT9-12-24W-MCT	120V	24W	White	Glass	3000K/4000K/5000K	2160	12.0" x 0.55"
RT9-7-12W-MCT-PIR	120V	12W	White	Glass	3000K/4000K/5000K	960	7.0" x 0.55"
RT9-9-18W-MCT-PIR	120V	18W	White	Glass	3000K/4000K/5000K	1440	9.0" x 0.55"
RT9-7-12W-MCT-PIR-UNV	120V ~ 277V	12W	White	Glass	3000K/4000K/5000K	960	7.0" x 0.55"
RT9-9-18W-MCT-PIR-UNV	120V ~ 277V	18W	White	Glass	3000K/4000K/5000K	1440	9.0" x 0.55"
RT7-A-60-xxxxK	120V	15W	Brushed Aluminum	PC	3000K or 4000K	1210	7.4" x 1.5"
RT7-A-30-xxxxK	120V	15W	Oil Rubbed Bronze	PC	3000K or 4000K	1210	7.4" x 1.5"

DC LIGHT ENGINE

******* Multiple Color Temperature - 3000K/3500K/4000K *******

- * Suitable for re-trofit most of ceiling fixtures and wall sconces
- * Easy installation
- * Multiple color temperature - 3000K/3500K/4000K
- * Class 2 dimming driver or none dimming driver
- * Wattage - 9W - 36W
- * 5 years warranty on LED and driver



Model	Voltage	Wattage	Color Temperature	Dimming	Source Lumen	Dimension (L x W x H)
R18W-D1	120V ~ 277V	9 - 22W	3000K/3500K/4000K	0 - 10V	1050 - 2400lm	7.9"OD x 1.5"H
R25W-D1	120V ~ 277V	14 - 28W	3000K/3500K/4000K	0 - 10V	1790 - 3000lm	11.0"OD x 1.5"H
R35W-D1	120V ~ 277V	22 - 36W	3000K/3500K/4000K	0 - 10V	2640 - 4200lm	13.5"OD x 1.5"H
L18W-D1	120V ~ 277V	10 - 22W	3000K/3500K/4000K	0 - 10V	1170 - 2400lm	8.6" x 4.5" x 1.4"
L23W-D1	120V ~ 277V	22 - 36W	3000K/3500K/4000K	0 - 10V	2600 - 4300lm	11.5" x 5.5" x 1.6"

* Option: 120V triac dimming

AC LIGHT ENGINE

******* Multiple Color Temperature - 3000K/3500K/4000K *******

- * Suitable for most of ceiling fixtures application
- * Easy installation
- * Multiple color temperature - 3000K/3500K/4000K
- * Driver on Board (DOB) design
- * Wattage - 12W - 32W
- * 5 years warranty



Model	Voltage	Wattage	Color Temperature	Dimming	Source Lumen	Dimension (OD x H)
NX-12W-xxxxK	120V	12W	3000K or 4000K	Triac	830lm	5.0" x 0.8"
NX-18W-xxxxK	120V	18W	3000K or 4000K	Triac	1700lm	7.0" x 0.8"
NX-25W-MCT	120V	25W	3000K/3500K/4000K	Triac	2040lm	9.4" x 0.8"
NX-32W-MCT	120V	32W	3000K/3500K/4000K	Triac	2940lm	12.2" x 0.8"

HOSPITALITY LIGHTING CUSTOM DESIGNED & MADE

- * Chandelier
- * Table Lamp / Desk Lamp / Floor Lamp
- * LED Room Number Sconce
- * LED Sconce / Reading Light

***** *Consult Factory* *****



CUSTOM DESIGNED & MADE

**** *Consult Factory* ****





XTC Lighting Group 306 Rexdale Blvd, Suite 11
Etobicoke, Ontario, Canada M9W 1R6
Tel: 416.742.4387 Fax: 416.742.0830
Sales: info@xtclighting.com
www.xtclighting.com